

Steel City^{*}




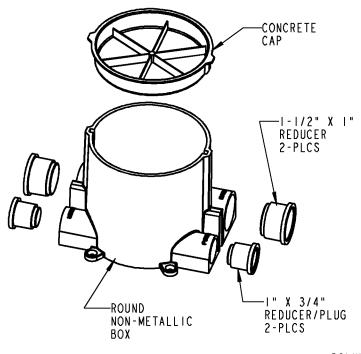



NOTES:

- I. MOLDED FROM A HIGH-GRADE POLYMER MATERIAL COMPATIBLE TO BE BONDED TO STANDARD SCHEDULE PVC CONDUIT USING PVC CEMENT.
- 2. 140 CU. INCHES MAXIMUM VOLUME 25 CU. INCHES PER INCH OF DEPTH
- 3. HUBS AND REDUCERS FURNISHED TO WORK WITH 3/4", I" AND I-I/2" STANDARD PVC CONDUIT.
- 4. FURNISHED COMPLETE WITH: QTY.I 68-HP FLOOR BOX TEMPORARY CONCRETE CAP QTY.2 I-I/2" X I" PVC REDUCERS
- OTY.2 I" X 3/4" PVC REDUCER/PLUGS
 5. MINIMUM CONCRETE BOX DEPTH: 3-1/2" FOR FUNITURE FEED SERVICE. 4" FOR FLUSH SERVICE

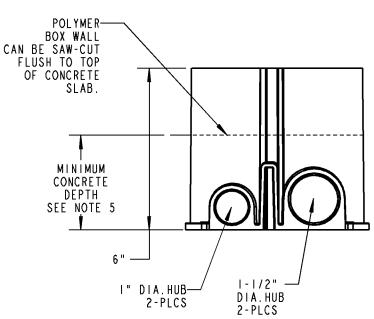

CATALOG NO:

68-HP NON-METALLIC FLOOR BOX

GENERAL NOTES Thomas@Betts ALL DIMENSIONS ARE FOR REFERENCE ONLY. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS. DESCRIPTION: 68-HP **REVISIONS** NON-METALLIC FLOOR BOX SEE ERN 2013889 FOR APPROVAL SIGNATURES & RELEASE DATE. ORIGINAL PROJECT NO / (ERN NO) SHEET NO: REV. NO: DRAWING NO: WSD-000582 PROJECT NO: 5AM400388 UD55819 / (2011942) 1 OF 1