

## Single hole earth point

Hole size	Length	Weight each	Part No.
M8 x 15mm	80mm	0.14kg	PC100-FU
M10 x 15mm	80mm	0.14kg	PC101
M12 x 15mm	80mm	0.14kg	PC102
M16 x 15mm	80mm	0.14kg	PC103

Stem diameter = 10.7mm (70mm<sup>2</sup>).



BS 7430

## Two hole earth point

Hole size	Length	Weight each	Part No.
M8 x 12mm	80mm	0.44kg	PC115-FU
Supplied c/w front plate for connection of 25mm x 3mm copper tape or 70mm <sup>2</sup> stranded copper cable.			
M8 x 12mm	80mm	0.44kg	PC120
Supplied c/w front plate for connection of 25mm x 3mm copper tape or 8mm diameter solid circular copper.			
M8 x 12mm	80mm	0.28kg	PC125
Supplied without front plate.			



BS EN 50164-1 Class H, BS 7430



Tightening torque 8Nm

## Four hole earth point


Hole size	Length	Weight each	Part No.
M8 x 14mm	75mm	0.41kg	PC110

Stem diameter = 10.7mm (70mm<sup>2</sup>).



BS 7430



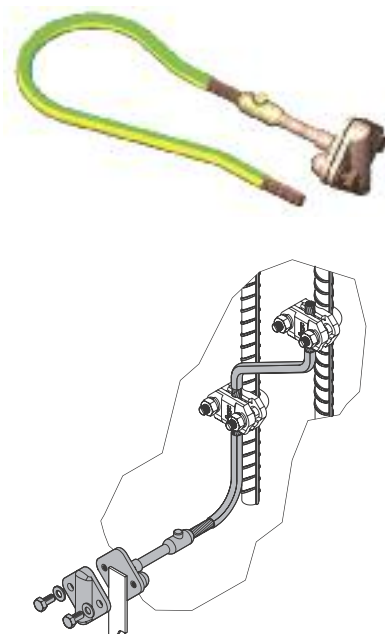

## Earth point with pre-welded tail

Description	Weight each	Part No.
As PC100-FU with prewelded 500mm long tail of 70mm <sup>2</sup> PVC insulated earth cable	0.56kg	<b>PC105</b>
As PC101 with prewelded 500mm long tail of 70mm <sup>2</sup> PVC insulated earth cable	0.56kg	<b>PC106</b>
As PC102 with prewelded 500mm long tail of 70mm <sup>2</sup> PVC insulated earth cable	0.56kg	<b>PC107</b>
As PC103 with prewelded 500mm long tail of 70mm <sup>2</sup> PVC insulated earth cable	0.56kg	<b>PC108</b>
As PC110 with prewelded 500mm long tail of 70mm <sup>2</sup> PVC insulated earth cable	1.14kg	<b>PC111<sup>†</sup></b>
As PC115-FU with prewelded 500mm long tail of 70mm <sup>2</sup> PVC insulated earth cable	0.84kg	<b>PC116<sup>†</sup></b>
As PC120 with prewelded 500mm long tail of 70mm <sup>2</sup> PVC insulated earth cable	0.84kg	<b>PC121</b>
As PC125 with prewelded 500mm long tail of 70mm <sup>2</sup> PVC insulated earth cable	0.84kg	<b>PC126-FU</b>


For earth points PC100-FU etc, please see separate datasheet.



BS EN 50164-1 Class H, BS 7430  
<sup>†</sup>UL467 (PC111, PC116)



Tightening torque 8Nm

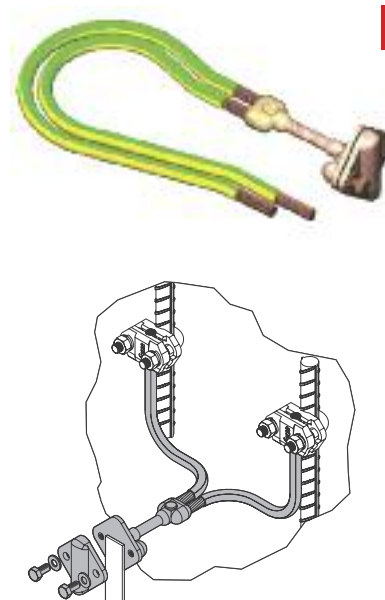

## **NEW** Earth point with double pre-welded tail

Description	Weight each	Part No.
As PC110 but with 2 x 500mm prewelded long tail of 70mm <sup>2</sup> PVC insulated earth cable	1.23kg	<b>PC211<sup>†</sup></b>
As PC115-FU but with 2 x 500mm prewelded long tail of 70mm <sup>2</sup> PVC insulated earth cable	1.26kg	<b>PC216<sup>†</sup></b>
As PC120 but with 2 x 500mm prewelded long tail of 70mm <sup>2</sup> PVC insulated earth cable	1.26kg	<b>PC221</b>

For earth points PC110 etc, please see separate datasheet.



BS EN 50164-1 Class H, BS 7430  
<sup>†</sup>UL467 (PC211, PC216)



Tightening torque 8Nm