



INSTALLATION INSTRUCTIONS


for The "Flood-Seal"® Disconnectable Dead Front Secondary Transformer Connector
DF Series (Cat. No. DF 22)

TO MOUNT DF SERIES CONNECTOR ONTO TRANSFORMER:

- Remove pull-tab plug from transformer stud hole.
- Remove waterproof access cap over transformer stud set screw.
- Loosen set screw.
- Slip connector over stud of transformer and position.
- Tighten set screw to a torque of 300 in./lbs. and replace cap.

TO INSTALL ACCESSORY ROCKET SLEEVES:

1. Strip cable insulation to length for connector, "pencil" insulation, and wire brush exposed conductor.
2. Apply silicone insulation to penciled end and spread evenly.
3. Use table to right to determine ring size for given cable.
4. Cut rocket ring at tip of arrow, leave correct size range showing.
5. Apply silicone grease on edge of opened cable entrance.
6. Push rocket sleeve onto cable(s).
7. Install proper lug with prescribed tool and die.
8. Mount lug onto contact pad stud, reinstall nut and washer, and torque.
9. Add silicone grease to edge of elliptical rubber shoulder on connector.
10. Slide rocket sleeve over lug and onto elliptical shoulder until rocket butts against connector insulation body.

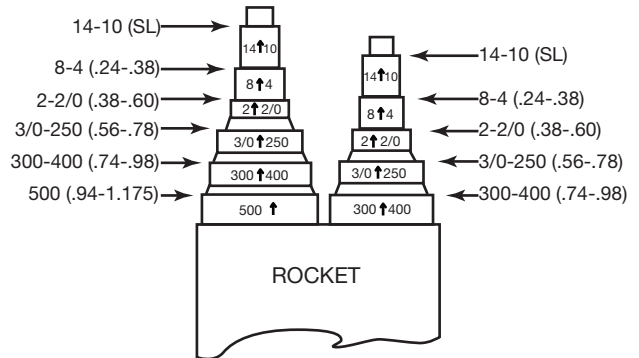

Thomas&Betts

Limited Warranty Applies. Refer to:

www.tnb.com/ecpwarranty for full warranty terms.

Thomas & Betts Corporation
Memphis, Tennessee
www.tnb.com

0032110 A
168_R3
Page 1 of 1

© 2012 Thomas & Betts. All Rights Reserved.



INSTALLATION INSTRUCTIONS


for The "Flood-Seal"® Disconnectable Dead Front Secondary Transformer Connector
DF Series (Cat. No. DF 22)

TO MOUNT DF SERIES CONNECTOR ONTO TRANSFORMER:

- Remove pull-tab plug from transformer stud hole.
- Remove waterproof access cap over transformer stud set screw.
- Loosen set screw.
- Slip connector over stud of transformer and position.
- Tighten set screw to a torque of 300 in./lbs. and replace cap.

TO INSTALL ACCESSORY ROCKET SLEEVES:

1. Strip cable insulation to length for connector, "pencil" insulation, and wire brush exposed conductor.
2. Apply silicone insulation to penciled end and spread evenly.
3. Use table to right to determine ring size for given cable.
4. Cut rocket ring at tip of arrow, leave correct size range showing.
5. Apply silicone grease on edge of opened cable entrance.
6. Push rocket sleeve onto cable(s).
7. Install proper lug with prescribed tool and die.
8. Mount lug onto contact pad stud, reinstall nut and washer, and torque.
9. Add silicone grease to edge of elliptical rubber shoulder on connector.
10. Slide rocket sleeve over lug and onto elliptical shoulder until rocket butts against connector insulation body.

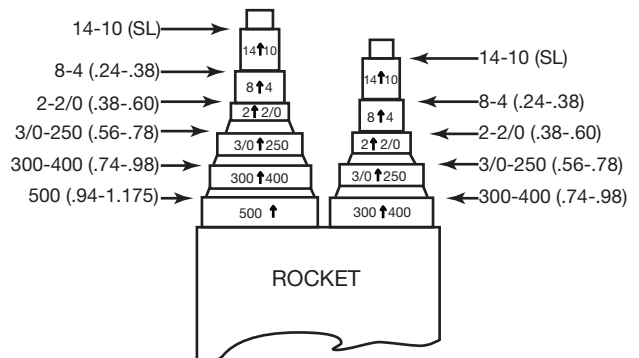

Thomas&Betts

Limited Warranty Applies. Refer to:

www.tnb.com/ecpwarranty for full warranty terms.

Thomas & Betts Corporation
Memphis, Tennessee
www.tnb.com

0032110 A
168_R3
Page 1 of 1

© 2012 Thomas & Betts. All Rights Reserved.