



## WARNING




Danger of Electric Shock! Installation of this product must be performed by trained installers in accordance with all applicable local, state and national electrical codes, installation standards and safety rules.

## INSTALLATION INSTRUCTIONS

for FSK 240-46 C Streetlight Kit


Accepts AL/CU Conductor · 600V Rated

**1**




Strip insulation approximately 1 "for the main, and 1/2" for the taps.


**2**



Select correct cut-off ring on tower for wire being used, and cut off end of tower. Refer to illustration below.

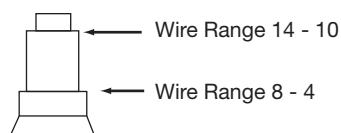


**4**

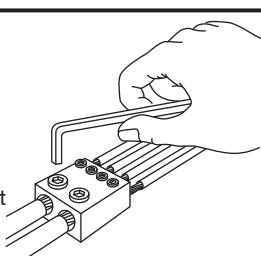


Insert conductors into connector. Tighten down Set Screws to recommended torque. Mate two halves of "Flood-Seal"® Housing for a watertight fully insulated connection.

**3**



Select correct cut-off ring on tower for wire being used. Cut off end of tower at the tip of arrow, leaving the correct wire size showing.

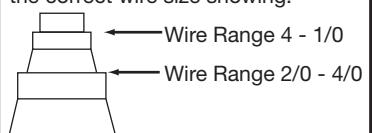

Limited Warranty Applies. Refer to:

[www.tnb.com/ecpwarranty](http://www.tnb.com/ecpwarranty) for full warranty terms.

© 2012 Thomas & Betts. All Rights Reserved.

Thomas & Betts Corporation

Memphis, Tennessee

[www.tnb.com](http://www.tnb.com)

0510484 A

201\_R1

Page 1 of 1

**Thomas & Betts**



## WARNING




Danger of Electric Shock! Installation of this product must be performed by trained installers in accordance with all applicable local, state and national electrical codes, installation standards and safety rules.

## INSTALLATION INSTRUCTIONS

for FSK 240-46 C Streetlight Kit


Accepts AL/CU Conductor · 600V Rated

**1**




Strip insulation approximately 1 "for the main, and 1/2" for the taps.


**2**



Select correct cut-off ring on tower for wire being used, and cut off end of tower. Refer to illustration below.

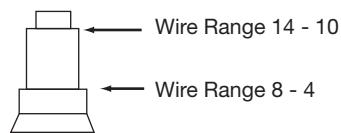


**4**

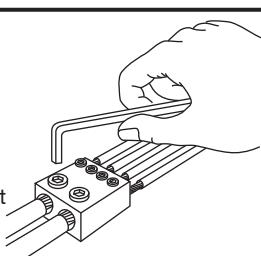


Insert conductors into connector. Tighten down Set Screws to recommended torque. Mate two halves of "Flood-Seal"® Housing for a watertight fully insulated connection.

**3**



Select correct cut-off ring on tower for wire being used. Cut off end of tower at the tip of arrow, leaving the correct wire size showing.

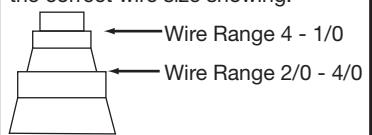

Limited Warranty Applies. Refer to:

[www.tnb.com/ecpwarranty](http://www.tnb.com/ecpwarranty) for full warranty terms.

© 2012 Thomas & Betts. All Rights Reserved.

Thomas & Betts Corporation

Memphis, Tennessee

[www.tnb.com](http://www.tnb.com)

0510484 A

201\_R1

Page 1 of 1

**Thomas & Betts**