




WARNING

Danger of Electric Shock! Installation of this product must be performed by trained installers in accordance with all applicable local, state and national electrical codes, installation standards and safety rules.

INSTALLATION INSTRUCTIONS


for "FLOOD-SEAL"® FS-95 Connector Kit

Force Fit Type

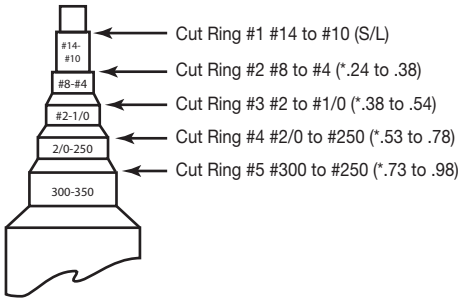


- 1** Refer to the cable range shown in raised numbers on each cut ring. Match the conductor size being installed to the correct ring.
- 2** Cut off the tip of sleeve up to the selected ring. The proper cut will leave the conductor range required showing on the sleeve.
- 3** Pencil the cable insulation.
- 4** Clean the cable before installing the rocket sleeve.

- 5** Lubricate both ends of the rocket sleeve and the cable with silicone grease. Hold the cable at an angle to the opening. Twist the rocket sleeve while pushing it on to the cable.



- 6** Compress the lug on to the cable.
- 7** Bolt the terminal to the bus.



- 8** Slide the rocket sleeve over the lug and on to the shoulder of the bus until the rocket butts against the rubber of the connector bar.

Force Fit Kit Catalog #	Conductor Size - Al or CU				Die Ref	Cut Ring #
	Concentric	Compressed	Compact	Solid		
HL 10-38 CS	#12 stranded thru #8 solid copper				-	1
CFG 8 CS	8	-	-	6	5/8 BG 687 243 TU 52 8A	2
CFG 6 CS	6	6	6	-		
CFG 4 CS	4	4	4	-		
CFG 2 CS	2	2	2&1	1	840 324 249 658 TX 76 11A	3
CFG 1 CS	1	1	1/0	1/0		
CFG 1/0 CS	1/0	1/0	2/0	2/0		
CFG 1/0 CS	1/0	1/0	2/0	2/0	840 324 249 658 TX 76 11A	4
CFG 2/0 CS	2/0	2/0	3/0	3/0		
CFG 3/0 CS	3/0	3/0	4/0	4/0		
CFG 4/0 CS	4/0	4/0	250	-	1-1/8-1 299-655 321 326 96 13A	5
CFG 250 CS	250	250	300	-		
CFG 300 CS	300	300	350	-		
CFG 350 CS	336.4-350	350	-	-		

Thomas & Betts

Limited Warranty Applies. Refer to:
www.tnb.com/ecpwarranty for full warranty terms.

Thomas & Betts Corporation
Memphis, Tennessee
www.tnb.com

0015164 A
155_R4
Page 1 of 1




WARNING

Danger of Electric Shock! Installation of this product must be performed by trained installers in accordance with all applicable local, state and national electrical codes, installation standards and safety rules.

INSTALLATION INSTRUCTIONS


for "FLOOD-SEAL"® FS-95 Connector Kit

Force Fit Type

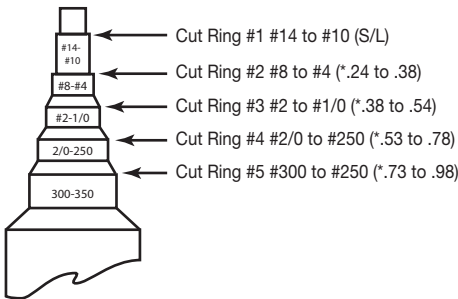


- 1** Refer to the cable range shown in raised numbers on each cut ring. Match the conductor size being installed to the correct ring.
- 2** Cut off the tip of sleeve up to the selected ring. The proper cut will leave the conductor range required showing on the sleeve.
- 3** Pencil the cable insulation.
- 4** Clean the cable before installing the rocket sleeve.

- 5** Lubricate both ends of the rocket sleeve and the cable with silicone grease. Hold the cable at an angle to the opening. Twist the rocket sleeve while pushing it on to the cable.



- 6** Compress the lug on to the cable.
- 7** Bolt the terminal to the bus.



- 8** Slide the rocket sleeve over the lug and on to the shoulder of the bus until the rocket butts against the rubber of the connector bar.

Force Fit Kit Catalog #	Conductor Size - Al or CU				Die Ref	Cut Ring #
	Concentric	Compressed	Compact	Solid		
HL 10-38 CS	#12 stranded thru #8 solid copper				-	1
CFG 8 CS	8	-	-	6	5/8 BG 687 243 TU 52 8A	2
CFG 6 CS	6	6	6	-		
CFG 4 CS	4	4	4	-		
CFG 2 CS	2	2	2&1	1	840 324 249 658 TX 76 11A	3
CFG 1 CS	1	1	1/0	1/0		
CFG 1/0 CS	1/0	1/0	2/0	2/0		
CFG 1/0 CS	1/0	1/0	2/0	2/0	840 324 249 658 TX 76 11A	4
CFG 2/0 CS	2/0	2/0	3/0	3/0		
CFG 3/0 CS	3/0	3/0	4/0	4/0		
CFG 4/0 CS	4/0	4/0	250	-	1-1/8-1 299-655 321 326 96 13A	5
CFG 250 CS	250	250	300	-		
CFG 300 CS	300	300	350	-		
CFG 350 CS	336.4-350	350	-	-		

Thomas & Betts

Limited Warranty Applies. Refer to:
www.tnb.com/ecpwarranty for full warranty terms.

Thomas & Betts Corporation
Memphis, Tennessee
www.tnb.com

0015164 A
155_R4
Page 1 of 1