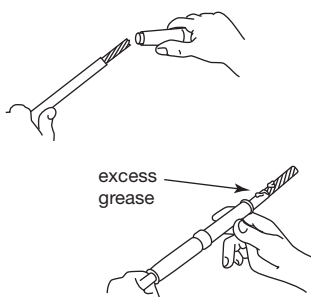


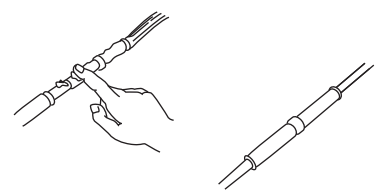


WARNING

Danger of Electric Shock! Installation of this product must be performed by trained installers in accordance with all applicable local, state and national electrical codes, installation standards and safety rules.

INSTALLATION INSTRUCTIONS

for RRK Series RADIATING RIB SPLICE SYSTEM
"Flood-Seal"® EPDM Insulated

<p>1 Strip ends of cable to the following reference chart.</p> <table><thead><tr><th>CABLE SIZE</th><th>STRIP LENGTH</th></tr></thead><tbody><tr><td>#2 TO 2/0</td><td>1-1/2 inches</td></tr><tr><td>3/0 TO 4/0</td><td>2-1/4 inches</td></tr><tr><td>250 TO 350 mcm</td><td>2-1/2 inches</td></tr><tr><td>500 mcm</td><td>2-3/4 inches</td></tr></tbody></table>	CABLE SIZE	STRIP LENGTH	#2 TO 2/0	1-1/2 inches	3/0 TO 4/0	2-1/4 inches	250 TO 350 mcm	2-1/2 inches	500 mcm	2-3/4 inches	<p>2 Slide EPDM rubber sleeve onto one conductor. NOTE: Excess grease on conductor may be moved to conductor insulation for use later. This will aid in step 4.</p> 	<p>3 Insert conductors into connector and crimp using recommended dies marked on connector. *(SEE DIAGRAM BELOW FOR SPECIAL NOTE)</p>  <p>* NOTE: 3/0 AND 4/0 SIZES DO NOT CRIMP HERE!</p> 	<p>4 Spread the excess grease from Step 2 over crimped connector. Slide EPDM rubber sleeve over connection until it locks in position. A visual inspection will show only one "hump" in the rubber sleeve when properly installed.</p> 
CABLE SIZE	STRIP LENGTH												
#2 TO 2/0	1-1/2 inches												
3/0 TO 4/0	2-1/4 inches												
250 TO 350 mcm	2-1/2 inches												
500 mcm	2-3/4 inches												

Thomas & Betts

Limited Warranty Applies. Refer to:
www.tnb.com/ecpwarranty for full warranty terms.

Thomas & Betts Corporation
Memphis, Tennessee
www.tnb.com

183_R1
Page 1 of 1



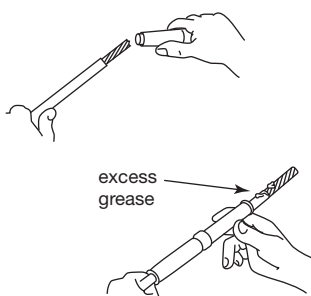


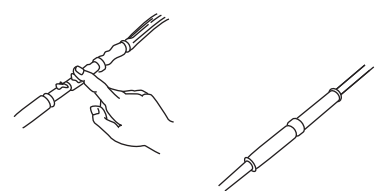


WARNING

Danger of Electric Shock! Installation of this product must be performed by trained installers in accordance with all applicable local, state and national electrical codes, installation standards and safety rules.

INSTALLATION INSTRUCTIONS

for RRK Series RADIATING RIB SPLICE SYSTEM
"Flood-Seal"® EPDM Insulated

<p>1 Strip ends of cable to the following reference chart.</p> <table><thead><tr><th>CABLE SIZE</th><th>STRIP LENGTH</th></tr></thead><tbody><tr><td>#2 TO 2/0</td><td>1-1/2 inches</td></tr><tr><td>3/0 TO 4/0</td><td>2-1/4 inches</td></tr><tr><td>250 TO 350 mcm</td><td>2-1/2 inches</td></tr><tr><td>500 mcm</td><td>2-3/4 inches</td></tr></tbody></table>	CABLE SIZE	STRIP LENGTH	#2 TO 2/0	1-1/2 inches	3/0 TO 4/0	2-1/4 inches	250 TO 350 mcm	2-1/2 inches	500 mcm	2-3/4 inches	<p>2 Slide EPDM rubber sleeve onto one conductor. NOTE: Excess grease on conductor may be moved to conductor insulation for use later. This will aid in step 4.</p> 	<p>3 Insert conductors into connector and crimp using recommended dies marked on connector. *(SEE DIAGRAM BELOW FOR SPECIAL NOTE)</p>  <p>* NOTE: 3/0 AND 4/0 SIZES DO NOT CRIMP HERE!</p> 	<p>4 Spread the excess grease from Step 2 over crimped connector. Slide EPDM rubber sleeve over connection until it locks in position. A visual inspection will show only one "hump" in the rubber sleeve when properly installed.</p> 
CABLE SIZE	STRIP LENGTH												
#2 TO 2/0	1-1/2 inches												
3/0 TO 4/0	2-1/4 inches												
250 TO 350 mcm	2-1/2 inches												
500 mcm	2-3/4 inches												

Thomas & Betts

Limited Warranty Applies. Refer to:
www.tnb.com/ecpwarranty for full warranty terms.

Thomas & Betts Corporation
Memphis, Tennessee
www.tnb.com

183_R1
Page 1 of 1