

OLD WORK CEILING FAN AND LIGHT FIXTURE BAR HANGER INSTRUCTION SHEET



Catalog Numbers:

54151CFB-BHL-OW.....Old Work Bar Hanger with 1-1/2" Deep Box. (Metallic Ceiling Fan Box)

R54151CFBBHLOW.....Old Work Bar Hanger with 1-1/2" Deep Box. (Metallic Ceiling Fan Box)

READ ALL INSTRUCTIONS AND WARNINGS CAREFULLY BEFORE PROCEEDING!



WARNING



DISCONNECT THE ELECTRICAL CIRCUIT SUPPLYING POWER TO THE OUTLET PRIOR TO INSTALLATION.



CAUTION



TO PREVENT INJURY, THE INSTALLER MUST ENSURE THAT THE HANGER IS SECURELY INSTALLED IN ACCORDANCE WITH THESE INSTRUCTIONS BEFORE MOUNTING OR CONNECTING A CEILING FAN OR LIGHT FIXTURE.

AFTER INSTALLATION OF THE HANGER, BE SURE TO FOLLOW ALL MOUNTING INSTRUCTIONS WITH THE CEILING FAN OR LIGHT FIXTURES.



CAUTION



DO NOT EXCEED MAXIMUM WEIGHT RATINGS

FOR 16" SPANS

MAX LIGHT FIXTURE = 200 LBS.

MAX CEILING FAN = 70 LBS.

FOR 24" SPANS

MAX LIGHT FIXTURE = 50 LBS.

MAX CEILING FAN = 35 LBS.


INSTALL THIS BAR HANGER SUPPORT ONLY IN ACCORDANCE WITH APPLICABLE NATIONAL AND LOCAL BUILDING AND ELECTRICAL CODES.

— CONSULT A QUALIFIED ELECTRICIAN IF YOU HAVE ANY QUESTIONS. —

IMPORTANT SAFETY NOTICE: USE ONLY METALLIC BOX AND SCREWS PROVIDED IN KIT. DO NOT SUBSTITUTE!


INSTALLATION INSTRUCTIONS:

- 1) Insert bar hanger through old outlet box hole in the ceiling drywall as shown.

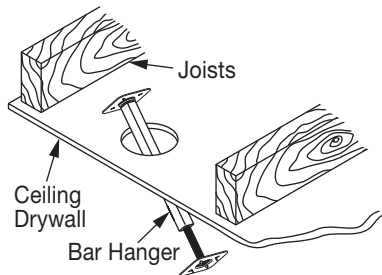


- 2) Rotate the square tube portion by hand until the end plates contact the wood joists. Continue to rotate until the end plate spurs fully engage with the joists.


Note: Rotation will become more difficult as the spurs engage into the joists.

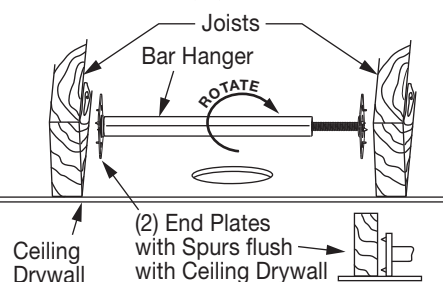

- 3) Assemble (2) screws through top of flange of the hanger bracket and tighten one locknut over each screw, creating a hanger bracket assembly.
- 4) Place hanger bracket assembly over square tube portion of hanger bar. Screws pointing downward.
- 5) Place outlet box over the two screws.
- 6) Assemble one locknut over each screw on the inside of outlet box.
- 7) Tighten locknuts with appropriate tool, locknuts must be tight.

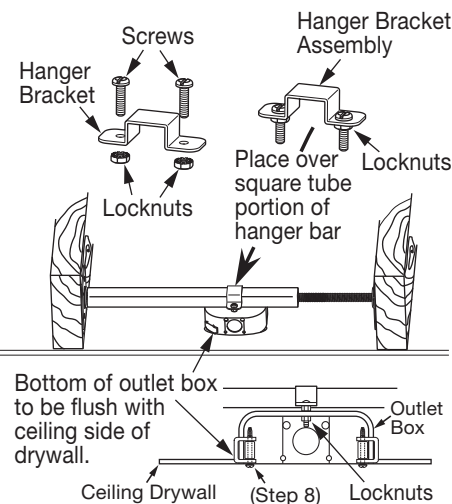

- 8) Only use #10-32 mounting screws with lockwashers and sleeve for end of screw supplied when installing the fan or fixture.

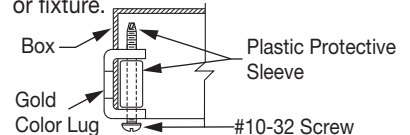

WARRANTY: Thomas & Betts sells this product with the understanding that the user will perform all necessary tests to determine the suitability of this product for the user's intended application. Thomas & Betts warrants that this product will be free from defects in materials and workmanship for a period of two (2) years following the date of purchase. Upon prompt notification of any warranted defect, Thomas & Betts will, at its option, repair or replace the defective product or refund the purchase price. Proof of purchase is required. Misuse or unauthorized modification of the product voids all warranties.

Limitations and Exclusions: THE ABOVE WARRANTY IS THE SOLE WARRANTY CONCERNING THIS PRODUCT, AND IS IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE SPECIFICALLY DISCLAIMED. LIABILITY FOR BREACH OF THE ABOVE WARRANTY IS LIMITED TO COST OF REPAIR OR REPLACEMENT OF THE PRODUCT, AND UNDER NO CIRCUMSTANCES WILL THOMAS & BETTS BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Thomas & Betts Corporation
Memphis, Tennessee
www.tnb.com

© 2010 Thomas & Betts. All Rights Reserved.

TA02461 C