


INSTALLATION INSTRUCTIONS

# Flush Cover

## For flush service round floor box

**Steel City®**

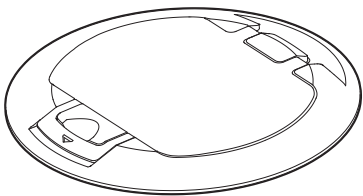

**WARNING:**

- Risk of shock, disconnect power before installation.



**CAUTION:**

- Product should be installed by a qualified electrician in accordance with national and local electrical codes.

**Cover operation:**  
How to open and close lid on cover

1. Opening:
  - a. Pull latch out to release lid which will open slightly (¼"). (Figure 1)
  - b. Lift lid to open to full, flat position. (Figure 2)
2. Closing:
  - a. Press lid down until latch is engaged. (Figure 3)

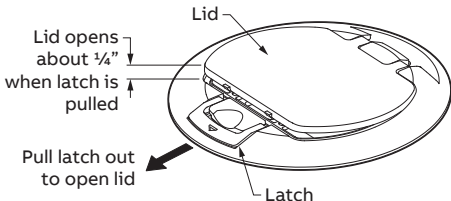


Figure 1




Figure 2




Figure 3



**Important**

Read and understand all instructions and safety information before use. Be aware of proper usage and potential hazards.

**Flush cover types:**

Product selection	
Part no:	Flush cover type
68-HP-FC-ALM	Aluminum
68-HP-FC-BRS	Brass
68-HP-FC-BLK	Black
68-HP-FC-BLK-CK	Black, Cerakote*

Note: Product must be installed in accordance with applicable national and local electrical codes.  
\*Cerakote is a copyright of NIC INDUSTRIES INC®

**Installation:**

**Important:** Read all applicable instructions before installing Floor Box, Flush Mounting Kit, and Flush Cover.

1. The following parts are required.
  - 68-HP Series Floor Box (sold separately)
  - 68-HP-FMK Flush Mounting Kit (sold separately)
  - 68-HP-FC-XXX Flush Cover
2. Attach Flush Cover to Flush Mounting Kit (Figure 4) using #6 32 x 1 1/4" long screws (supplied).

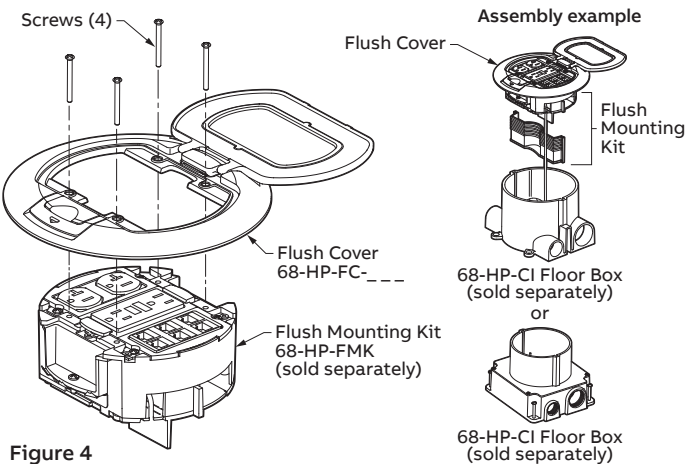


Figure 4