


INSTALLATION INSTRUCTIONS

Drain Filter, stainless steel FBDRFLTR

T&B Fittings



WARNING:

- Risk of shock, disconnect power before installation.



CAUTION:

- Product should be installed by a qualified electrician in accordance with national and local electrical codes.



CAUTION:

- This product shall not be used in hazardous (classified) locations.

Instructions:

For use only with FBDR series stainless dome drains.

1. Install the FBDRFLTR filter body by inserting either of the open ends into the I.D. of the FBDR series dome drain as shown in Figure 1. Filter body is bi-directional.
2. Install the FBDRFLTR filter end piece into open end of the FBDR series dome drain, with the smaller diameter feature towards the drain as shown in Figure 1. Firmly press the FBDRFLTR filter end piece into the FBDRFLTR filter body. Pressure may be applied (with thumb) to the outer ring of the FBDRFLTR filter end piece but not to the filter element.
3. Installation of the stainless steel FBDRFLTR drain filter is complete. **NOTE:** the FBDRFLTR can be installed before or after (assuming access is available) the FBDR series drain is installed in an enclosure. Location of the drain locknut does not affect installation of the FBDRFLTR drain filter.



Important

Read and understand all instructions and safety information before use. Be aware of proper usage and potential hazards.

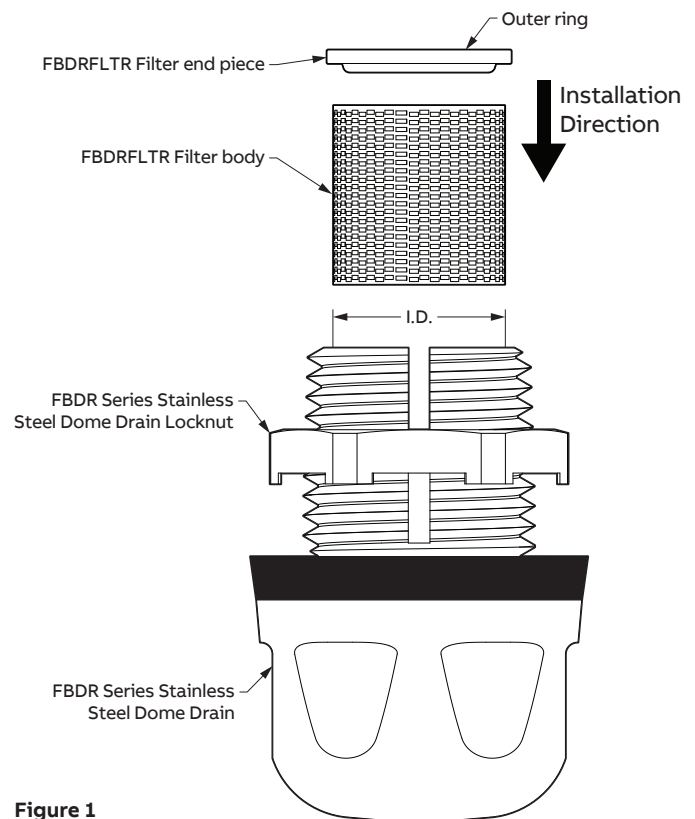


Figure 1