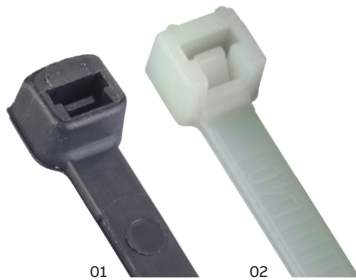

 TECHNICAL DATA SHEET

Cable Tie, standard, 18 lbs. series

Natural and UV resistant black

Catamount®



Cable ties are primarily used to cinch wires and cables together to form a neat and organized bundle.

Certifications / Standards:



01 UV resistant (-0)
02 Natural (-9)

Ratings:

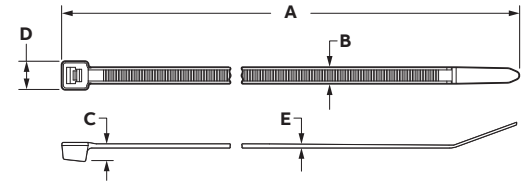
- Min. Bundle Dia: 0.06" (1.6 mm)
- Max. Bundle Dia: 0.87" (22 mm)
- Tensile Strength: 18lb (80N)
- Min. Operating Temperature: -40°F (-40°C)
- Max. Operating Temperature: 185°F (85°C)
- Min. Installation Temperature: -4°F (-20°C)

Installation:

- Install with approved ABB cable tie tool such as ERG50, QC-100, L-200, L-400-C

Materials / Finishes:

- Natural Polyamide (Nylon 6.6)
- UV-resistant black (Nylon 6.6)



Product selection - in. (mm)					
Part no:	A	B	C	D	E
GID no:	± 0.125 (3.0)	± 0.01 (0.25)	± 0.03 (0.76)	± 0.03 (0.76)	± 0.01 (0.25)
L-4-18-9-M	4.1	0.1	0.15	0.18	0.04
7TAG054060R0022	(105)	(2.4)	(3.8)	(4.60)	(1.1)
L-4-18-9-C					
7TAG054020R0003					
L-4-18-0-C					
7TAG054030R0003					
L-4-18-0-M					
7TAG054070R0008					

Note: Product must be installed in accordance with applicable national and local electrical codes.