


TECHNICAL DATA SHEET - INTERACTIVE PDF

Cable Tie, standard, 50 lbs. series

Natural and UV resistant black


Catamount®

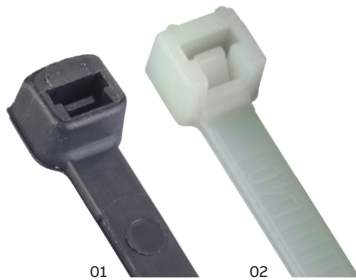

01

02

01 UV resistant (-0)
02 Natural (-9)

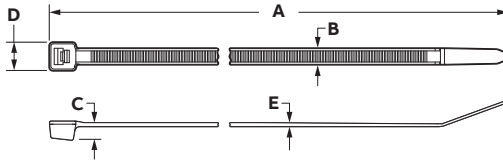

Ratings:

- Tensile Strength: 50lb (222N)
- Min. Operating Temperature: -40°F (-40°C)
- Max. Operating Temperature: 185°F (85°C)
- Min. Installation Temperature: -4°F (-20°C)

Installation:

- Install with approved ABB cable tie tool such as ERG50, QC-100, L-200, L-400-C

Materials / Finishes:

- Natural Polyamide (Nylon 6.6)
- UV-resistant black (Nylon 6.6)

Conforms to:

- AH-2 Plenum Rated
- UL94 V-2
- Type 21S

tnb.abb.com (US/Latin America)
tnb.ca.abb.com (Canada)
abb.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

Cable ties are primarily used to cinch wires and cables together to form a neat and organized bundle.

Certifications / Standards:



3-Part Specification: End User Tools

Product selection - in. (mm)							
Part no: GID no:	A ±0.25 (6.4)	B ±0.01 (0.25)	C ±0.03 (0.76)	D ±0.03 (0.76)	E ±0.01 (0.25)	Min. bundle dia.	Max. bundle dia.
L-7-50-0-C 7TAG054290R0012	7.6 (192)	0.18 (4.6)	0.22 (5.5)	0.30 (7.6)	0.05 (1.3)	0.06 (1.57)	1.87 (47.6)
L-7-50-0-M 7TAG054330R0007	7.6 (192)						
L-7-50-9-C 7TAG054290R0013	7.6 (192)						
L-7-50-9-M 7TAG054330R0008	7.6 (192)						
L-11-50-0-C	11.3 (286)						3.06 (77.7)
L-11-50-0-D	11.3 (286)						
L-11-50-9-C	11.3 (286)						
L-11-50-9-D	11.3 (286)						
L-14-50-0-C	14.3 (364)						4.00 (101.6)
L-14-50-9-L	14.3 (364)						
L-14-50-0-L	14.3 (364)						
L-14-50-0-D	14.3 (364)						
L-14-50-9-C	14.3 (364)						
L-14-50-9-D	14.3 (364)						

Note: Product must be installed in accordance with applicable national and local electrical codes.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction – in whole or in part – is forbidden without prior written consent of ABB.
© 2020 ABB Installation Products Inc. and/or its related companies. All Rights Reserved.