




T&B Rigid Fittings

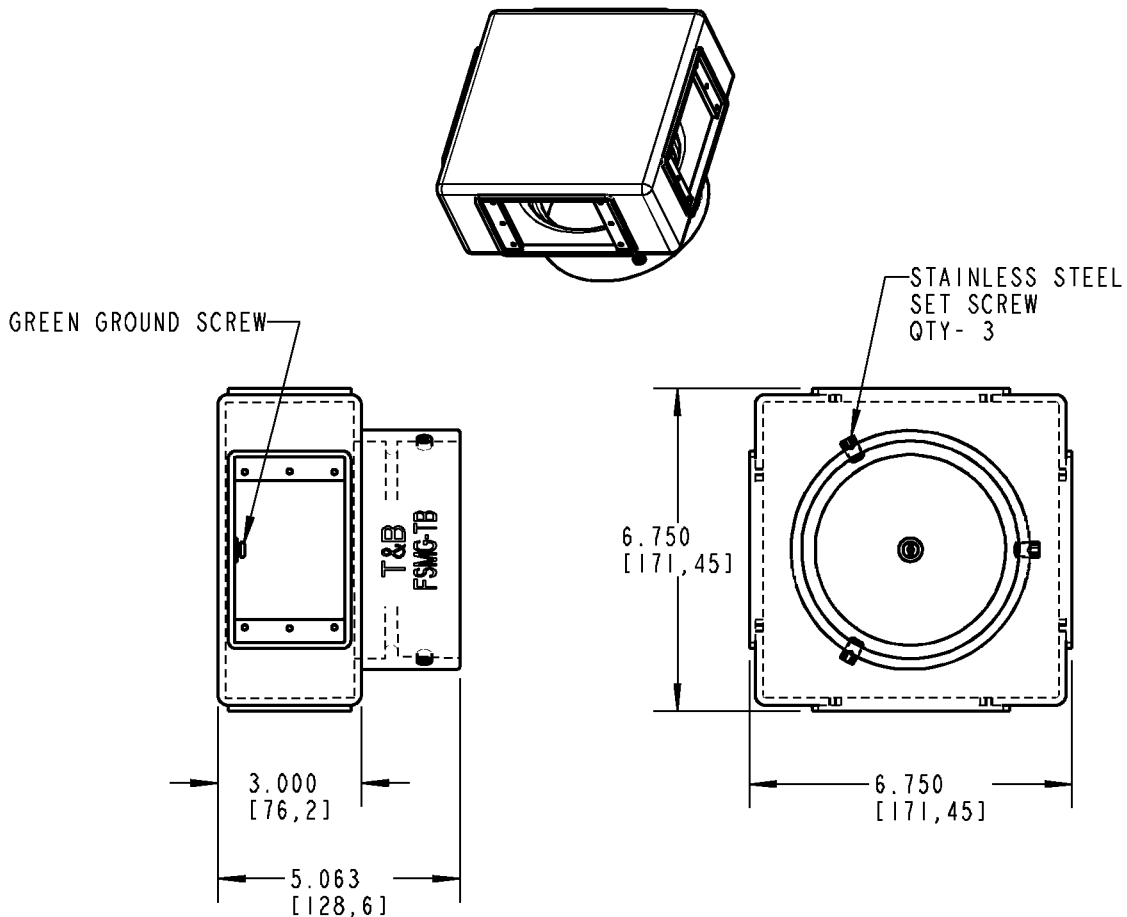

CAT. NO. **FSMG-TB**

NOTES:

1. MATERIAL: COPPER-FREE ALUMINUM CASTING.
2. FINISH: CLEAR EPOXY COATING.
3. WIRING CAPACITY: 100 CU. IN. MINIMUM.
4. ATTACHES TO EITHER THREADED OR UNTHREADED 4" RIGID CONDUIT.
5. cULus LISTED FOR WET LOCATIONS WHEN USED WITH WEATHERPROOF COVERS.
6. FOUR STANDARD FS OPENINGS TO ACCOMODATE SINGLE, DUPLEX AND GFCI RECEPTACLES WITH WEATHERPROOF COVERS.

GENERAL NOTES

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.

REVISIONS

- | | |
|---|--|
| 1 | SEE ERN 2003578 FOR APPROVAL SIGNATURES & RELEASE DATE.
PROJECT NO: RD55391 |
|---|--|

DESCRIPTION:

OUTDOOR CONNECTION BOX

Thomas & Betts
www.tnb.com

ORIGINAL PROJECT NO / (ERN NO)

RD55391 / (2002339)

SHEET NO:

1 OF 1

REV. NO:

1

DRAWING NO:

WSD-000001