


T&B Sta-Kon

ALL DIMENSIONS ARE APPROXIMATE.

CATALOG No.	DIM. A	DIM. B	WIRE RANGE	BOLT HOLE
RG9711U	.578	.312	2AN	1/4
RG9721U	.578	.312	2AN	5/16
RG9731U	.578	.312	2AN	3/8
RG9711UF	.406	-----	2AN	1/4
RJ9731U	.718	.406	1/0 AN	3/8
RJ9711U	.718	.406	1/0 AN	1/4
RK9731U	.810	.495	2/0 AN	3/8
RK9751U	.810	.495	2/0 AN	1/2

AN = AIRCRAFT WIRE

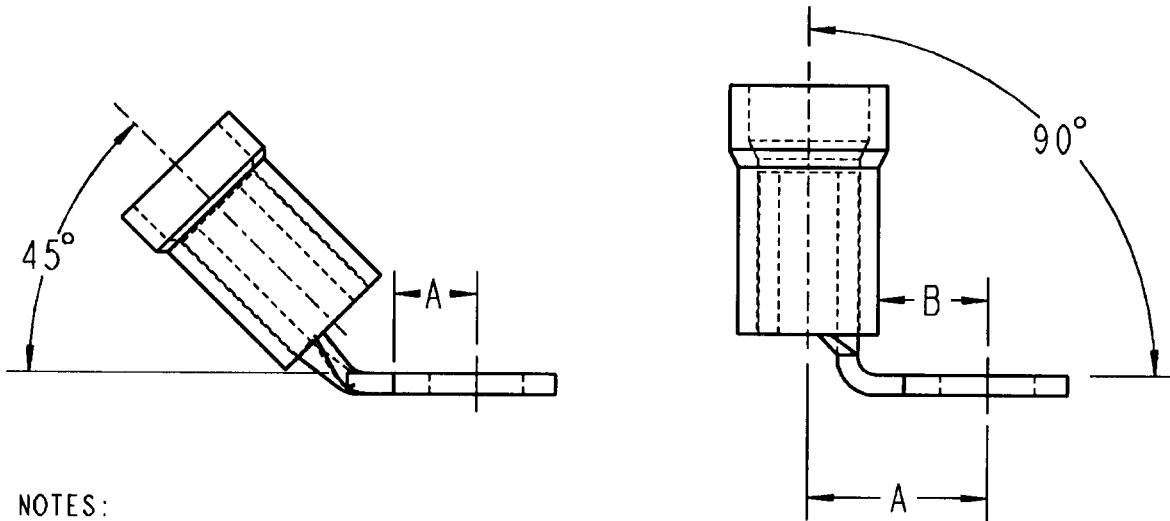

NOTES:

1. MATERIAL: ELECTROLYTIC COPPER
2. FINISH: TIN PLATED
3. NYLON INSULATOR, UL94-V2
4. SAME AS STANDARD T&B CATALOG NUMBER BUT WITH A "U" SUFFIX FOR 90° BEND OR "UF" FOR 45° BEND.
5. INSTALLATION TOOLS: TBM6 AND TBM6S

GENERAL NOTES

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.

REVISIONS

- 5 SEE ERN (2015083) FOR APPROVAL SIGNATURES & RELEASE DATE.
PROJECT NO: TM400023

www.tnb.com

Thomas & Betts
A Member of the ABB Group

DESCRIPTION: **NYLON INSULATED RING TERMINAL,
45° & 90° UPRIGHT BEND**

ORIGINAL PROJECT NO / (ERN NO)

TM401323 / (2004841)

SHEET NO:

1 OF 1

REV. NO:

5

DRAWING NO:

WSD-000093

THIS DRAWING IS INTENDED FOR DESCRIPTIVE PURPOSES ONLY. AND THE RIGHT IS RESERVED TO DEVIATE FROM ANY OF THE DETAILS SHOWN HEREON.
COPYRIGHT THOMAS & BETTS CORPORATION. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL.