




Steel City

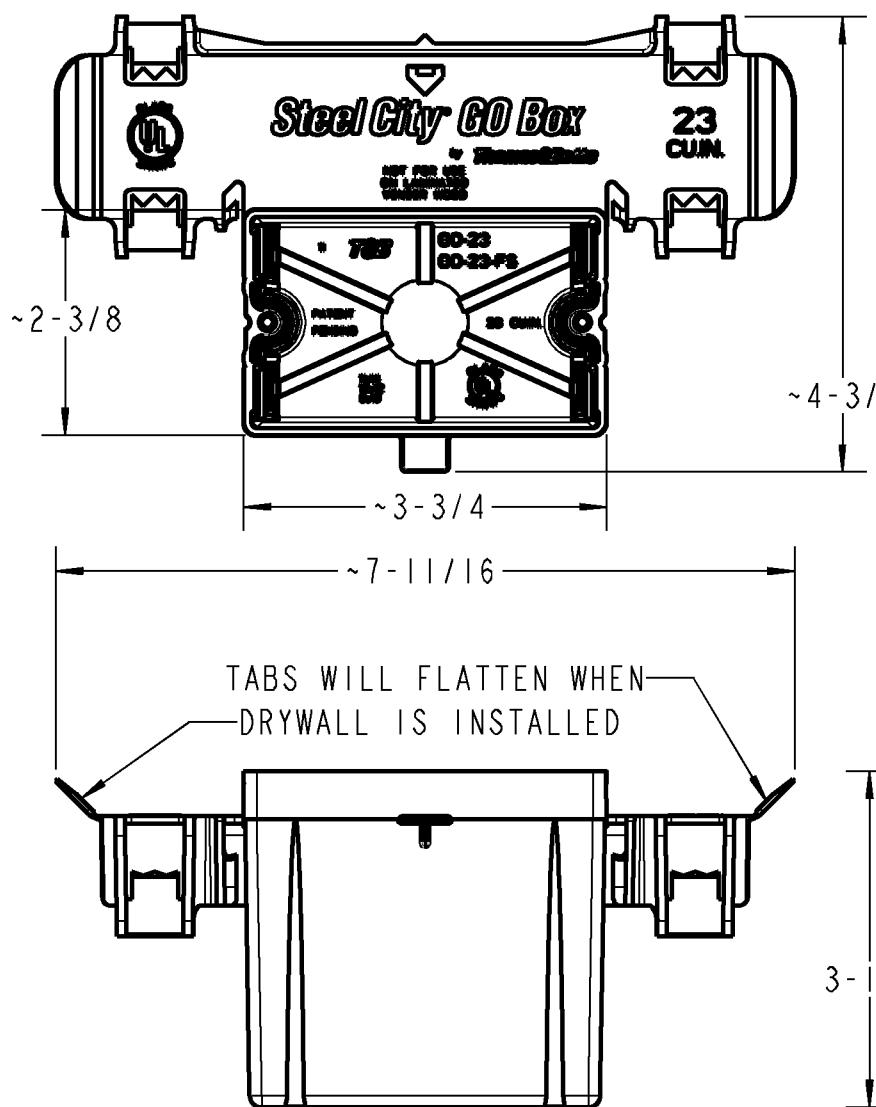

WARNING!

- * SOLVENTS CANNOT BE APPLIED TO ANY POLYCARBONATE ELECTRICAL BOXES.
- * DO NOT SPRAY PAINT POLYCARBONATE ELECTRICAL BOXES WITH ANY SOLVENT-BASED PAINT.
- * DO NOT SPRAY PAINT POLYCARBONATE ELECTRICAL BOXES WITH SPRAY PAINT APPLICATION WHICH INCLUDES ANY SOLVENT.

NOTES:

- 1-MATERIAL: POLYCARBONATE PC3910 (BLACK) 80°C HEAT RATED MATERIAL.
- 2-CLASSIFIED FOR TWO HOUR FIREWALL & IS UL LISTED E11461/R9140.
- 3-BOX TESTED TO -20°C (4°F).
- 4-PERMISSIBLE FOR USE WITH 90°C NON-METALLIC SHEATHED CABLE.

CAT. NO.GO-23-FS FOR "FAST SET" DEVICE MOUNTING HOLES 1- GANG BOX.
CAT. NO.GO-23 FOR STANDARD DEVICE MOUNTING HOLES 1- GANG BOX.

GENERAL NOTES		Thomas & Betts A Member of the ABB Group			
1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.		www.tnb.com			
REVISIONS		DESCRIPTION: GRIP ON 1 GANG NON-METALLIC BOX PUSH-ON STUD MOUNTING / NM CABLE			
2	SEE ERN 2016537 FOR APPROVAL SIGNATURES & RELEASE DATE. PROJECT NO: NM400330	ORIGINAL PROJECT NO / (ERN NO)	SHEET NO:	REV. NO:	DRAWING NO: WSD-000170
		ND55585 / (ERN2005662)	1 OF 1	2	