




T&B Fittings

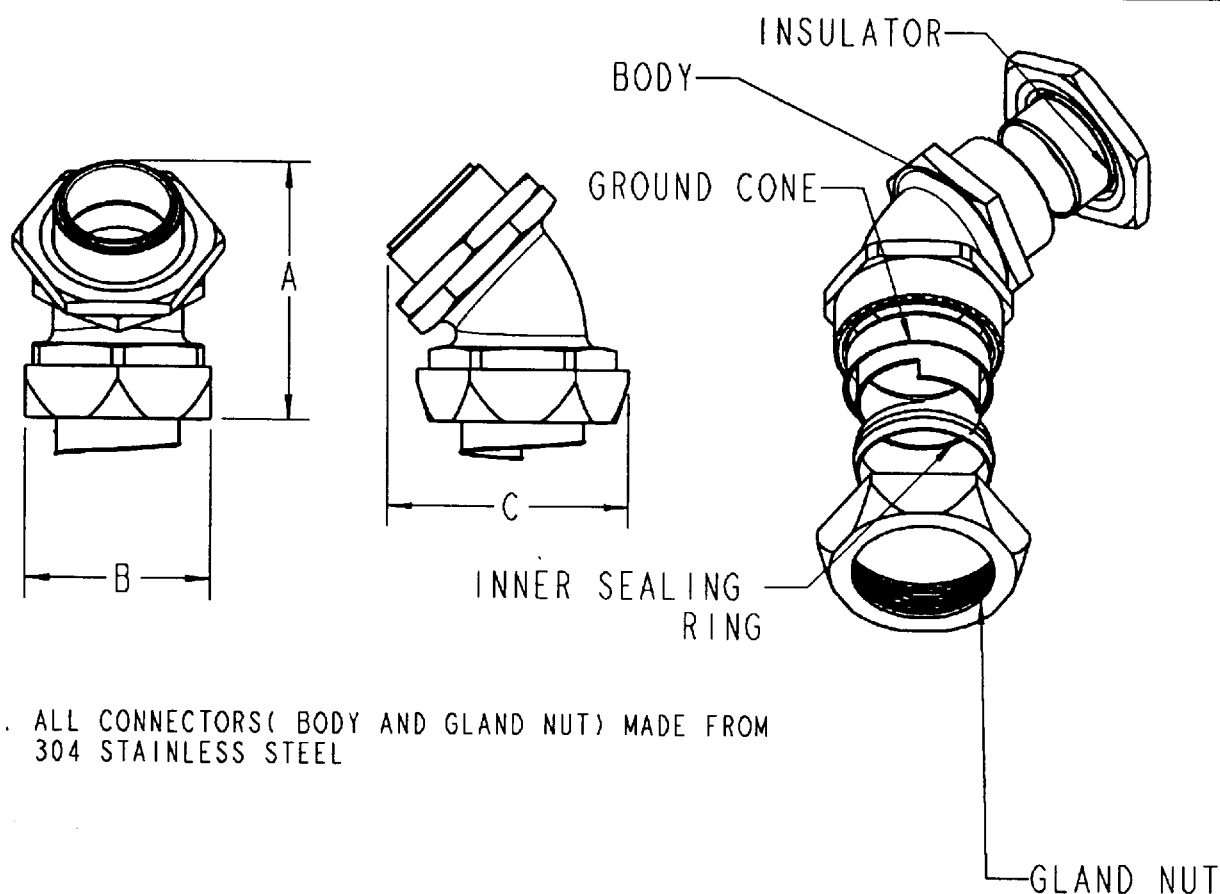

CAT. No.	SIZE	DESCRIPTION	DIM "A"	DIM "B"	DIM "C"
5341SST	3/8"	45° LIQUID TIGHT INSULATED CONNECTOR	1.84 (46.74)	1.02 (25.91)	1.43 (36.32)
5342SST	1/2"	45° LIQUID TIGHT INSULATED CONNECTOR	1.62 (41.15)	1.18 (29.97)	2.04 (51.82)
5343SST	3/4"	45° LIQUID TIGHT INSULATED CONNECTOR	2.32 (58.93)	1.37 (34.80)	1.93 (49.02)
5344SST	1.0"	45° LIQUID TIGHT INSULATED CONNECTOR	2.86 (72.64)	1.77 (44.96)	2.37 (60.20)
5345SST	1 1/4"	45° LIQUID TIGHT INSULATED CONNECTOR	3.33 (84.58)	2.12 (53.85)	2.80 (71.12)
5346SST	1 1/2"	45° LIQUID TIGHT INSULATED CONNECTOR	3.94 (100.08)	2.48 (62.99)	3.39 (86.11)
5347SST	2.0"	45° LIQUID TIGHT INSULATED CONNECTOR	4.73 (120.14)	3.04 (77.22)	4.23 (107.44)

GENERAL NOTES

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.

REVISIONS

SEE ERN (****)
FOR APPROVAL SIGNATURES
& RELEASE DATE.
PROJECT NO: ****

Thomas & Betts
www.tab.com

DESCRIPTION:

**ASS'Y DETAIL
FOR 45 DEG. LIQUID TIGHT INSULATED CONNECTOR**

ORIGINAL PROJECT NO / (ERN NO)

RD55583 / (2005808)

SHEET NO:

1 OF 1

REV. NO:

-

DRAWING NO:

WSD-000173

THIS DRAWING IS INTENDED FOR DESCRIPTIVE PURPOSES ONLY. AND THE RIGHT IS RESERVED TO DEVIATE FROM ANY OF THE DETAILS SHOWN HEREON.
©2005 Thomas & Betts - Proprietary. All Rights Reserved