




# Sta-Kon®

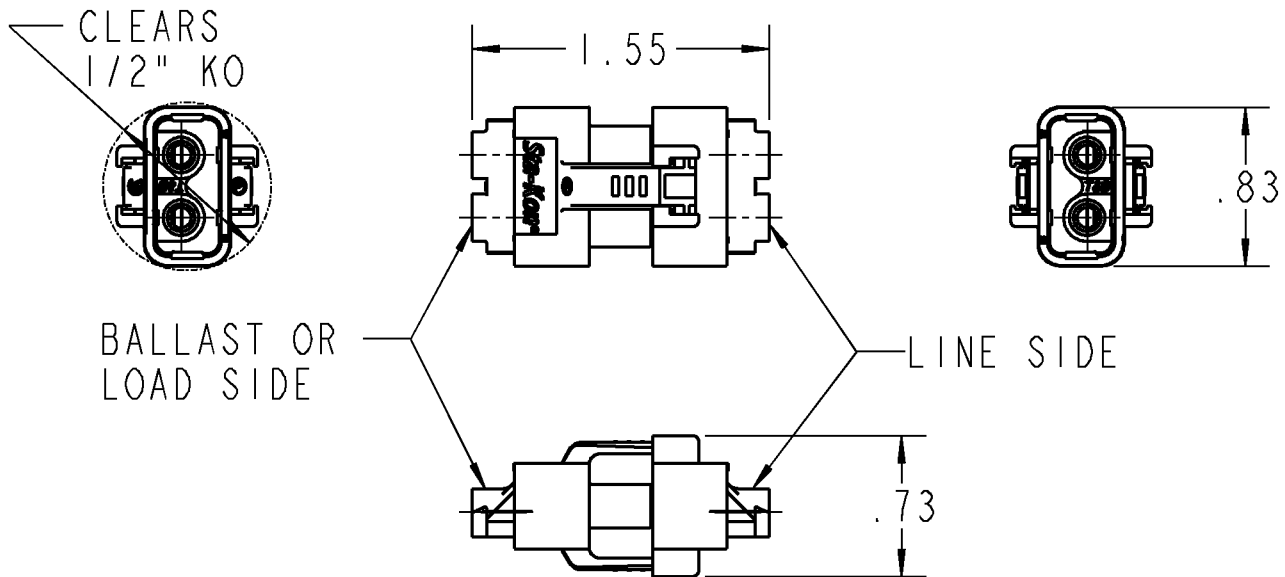

MATERIAL:  
 CONTACTS - COPPER ALLOY  
 HOUSING - POLYCARBONATE, UL94-V2

RATINGS:  
 ELECTRICAL - 4A, 600V MAX.  
 TEMPERATURE - 105°C MAX.

WIRE RANGE (COPPER WIRE ONLY):  
 18 - 12 SOLID  
 14 - 12 STRANDED (19 OR LESS)

WIRE STRIP LENGTH:  
 18 - 14 AWG = 3/8"  
 12 AWG = 13/32"

CATALOG No.: LD2P SERIES

PACKAGING SCHEMES:  
 LD2P-Q: 25 PIECE DISTRIBUTOR PACK, ORANGE  
 LD2P-D: BULK PACK, ORANGE  
 LD2WP-Q: 25 PIECE DISTRIBUTOR PACK, WHITE  
 LD2WP-D: BULK PACK, WHITE

<b>GENERAL NOTES</b>		<b>Thomas &amp; Betts</b> A Member of the ABB Group			
1. ALL DIMENSIONS ARE FOR REFERENCE ONLY. 2. DIMENSIONS IN BRACKETS [ ] ARE IN METRIC UNITS.					
<b>REVISIONS</b>		<b>DESCRIPTION: PUSH-IN FLUORESCENT LUMINAIRE DISCONNECT</b>			
1. SEE ERN (2014758) FOR APPROVAL SIGNATURES & RELEASE DATE. PROJECT NO: TM400023		ORIGINAL PROJECT NO / ( ERN NO ) <b>TD55738 / (201245)</b>	SHEET NO: <b>1 OF 1</b>	REV. NO: <b>1</b>	DRAWING NO: <b>WSD-000468</b>