


TwistTail®



NOTES:

1. FLAMABILITY: UL94HB
2. OPERATING TEMPERATURE: -40°F TO 185°F [-40°C TO 85°C]
3. MINIMUM TENSILE RATING: 30 LBS [133 N]
4. INSTALLATION TEMPERATURE: 0°F [-18°C] TO 149°F [65°C]

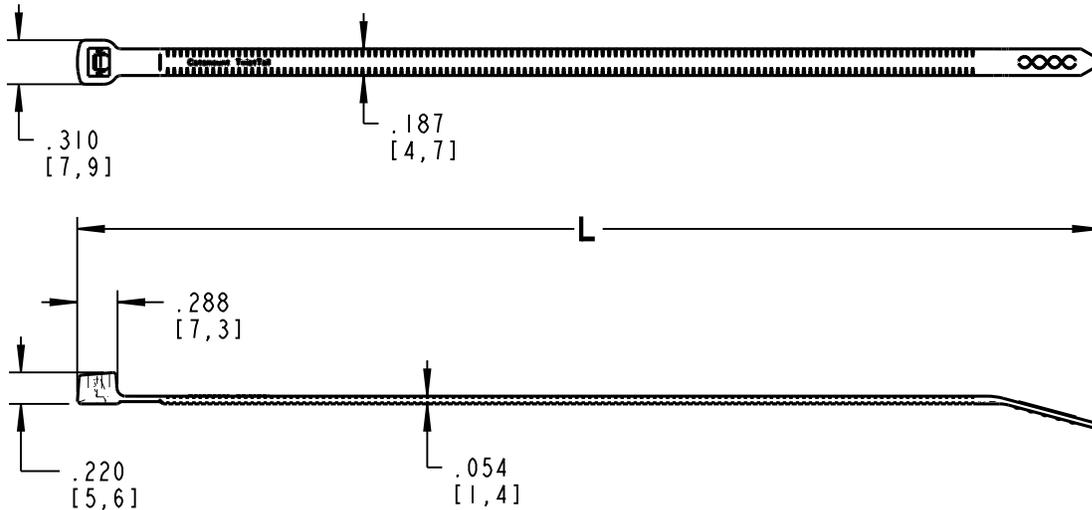

CATALOG NUMBER	MIN. BUNDLE DIA	MAX BUNDLE DIA	MATERIAL	COLOR	L
TT-7-30-0-L	0.25 [6,35]	1.75 [44,45]	NYLON 6.6, WEATHERABLE	BLACK	7.1 [180]
TT-7-30-9-L			NYLON 6.6	NATURAL	
TT-11-30-0-L	0.25 [6,35]	3 [76,2]	NYLON 6.6, WEATHERABLE	BLACK	11.1 [282]
TT-11-30-9-L			NYLON 6.6	NATURAL	
TT-14-30-0-L	0.25 [6,35]	4 [101,6]	NYLON 6.6, WEATHERABLE	BLACK	14.1 [358]
TT-14-30-9-L			NYLON 6.6	NATURAL	

GENERAL NOTES

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.

www.tnb.com

Thomas & Betts
A Member of the ABB Group

DESCRIPTION:

TWIST TAIL CABLE TIE

REVISIONS

- | | |
|---|---|
| 1 | SEE ERN (2017963) FOR APPROVAL SIGNATURES & RELEASE DATE.
PROJECT NO: FM401183 |
|---|---|

ORIGINAL PROJECT NO / (ERN NO)

FD55631 / (2011218)

SHEET NO:

1 OF 1

REV. NO:

1

DRAWING NO:

WSD-000536