

Shrink-Kon


PRODUCT REFERENCE:

TBW XXXX

RATED FOR
600V, 90°C
CONTINUOUS
USE

**EXPANDED
DIAMETER
CHART AS
SUPPLIED IN
1/10 OF INCH**

EXAMPLE: TBW0500

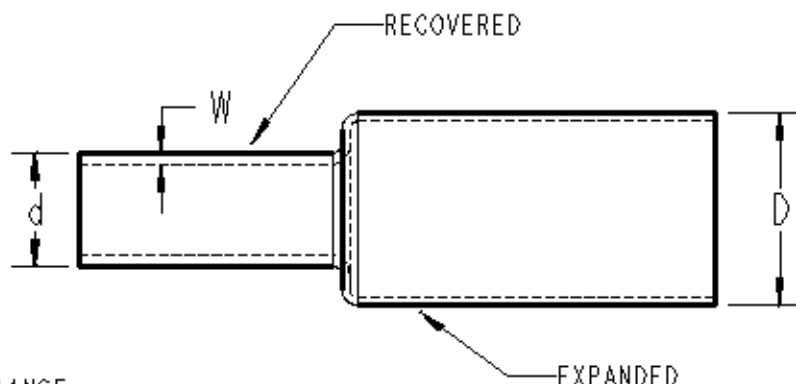

NOTES:

- ALL PRODUCTS SHALL BE RoHS COMPLIANCE.
- STANDARD COLOR: BLACK.
- PACKAGING: "TBW" PRODUCTS ARE PACKED IN POLYBAG (SEE PRODUCT REFERENCE STRUCTURE FOR DETAILS).

"REFERENCE CHART"

ABB PRODUCT REF.	EXPANDED DIA. AS SUPPLIED: (D)		FULLY RECOVERED DIA.: (d)	WALL THICKNESS AFTER SHRINKING: (W)	QUANTITY PER BAG	TOTAL LENGTH PER BAG
	[inch]	[mm]	[mm]	[mm]	[PIECES 1.22m]	[m]
TBW0350	0.35"	8.9	3.0	1.0	5	6.1
TBW0500	0.51"	13.0	4.1	2.4	5	6.1
TBW0750	0.75"	19.1	6.1	2.4	5	6.1
TBW1100	1.10"	27.9	8.9	3.0	2	2.4
TBW1500	1.50"	38.1	11.9	4.1	2	2.4
TBW2000	2.00"	50.8	16.0	4.1	1	1.2
TBW2700	2.70"	68.1	22.1	4.1	1	1.2
TBW3500	3.54"	89.9	30.0	4.1	1	1.2
TBW4700	4.72"	119.9	39.9	4.3	1	1.2

"MATERIAL CHART"

MATERIAL	CROSSLINKED POLYOLEFIN WITH THERMOPLASTIC ADHESIVE LINER
SHRINK RATIO	3:1
RoHS	YES
TUBE TYPE	DUAL WALL
TEMP. RANGE	-55°C TO +110°C
SHRINKING TEMP.	+120°C
WALL THICKNESS	THICK
STANDARD COLOR	BLACK
OTHER PROPERTIES	SILICONE, HALOGEN, CADMIUM AND LEAD FREE

GENERAL NOTES

- ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.

REVISIONS

** SEE ERN (****)
FOR APPROVAL SIGNATURES
& RELEASE DATE.
PROJECT NO: ****

www.tnb.com

DESCRIPTION:

**HEAT SHRINK TUBING "TBW"
FOR ABB GLOBAL LESS NORTH AMERICA**

ORIGINAL PROJECT NO / (ERN NO)

017P000624 / (2016681)

SHEET NO:

1 OF 1

REV. NO:

**

DRAWING NO:

WSD-001478

Thomas & Betts
A Member of the ABB Group