




# Pos-E-Kon®

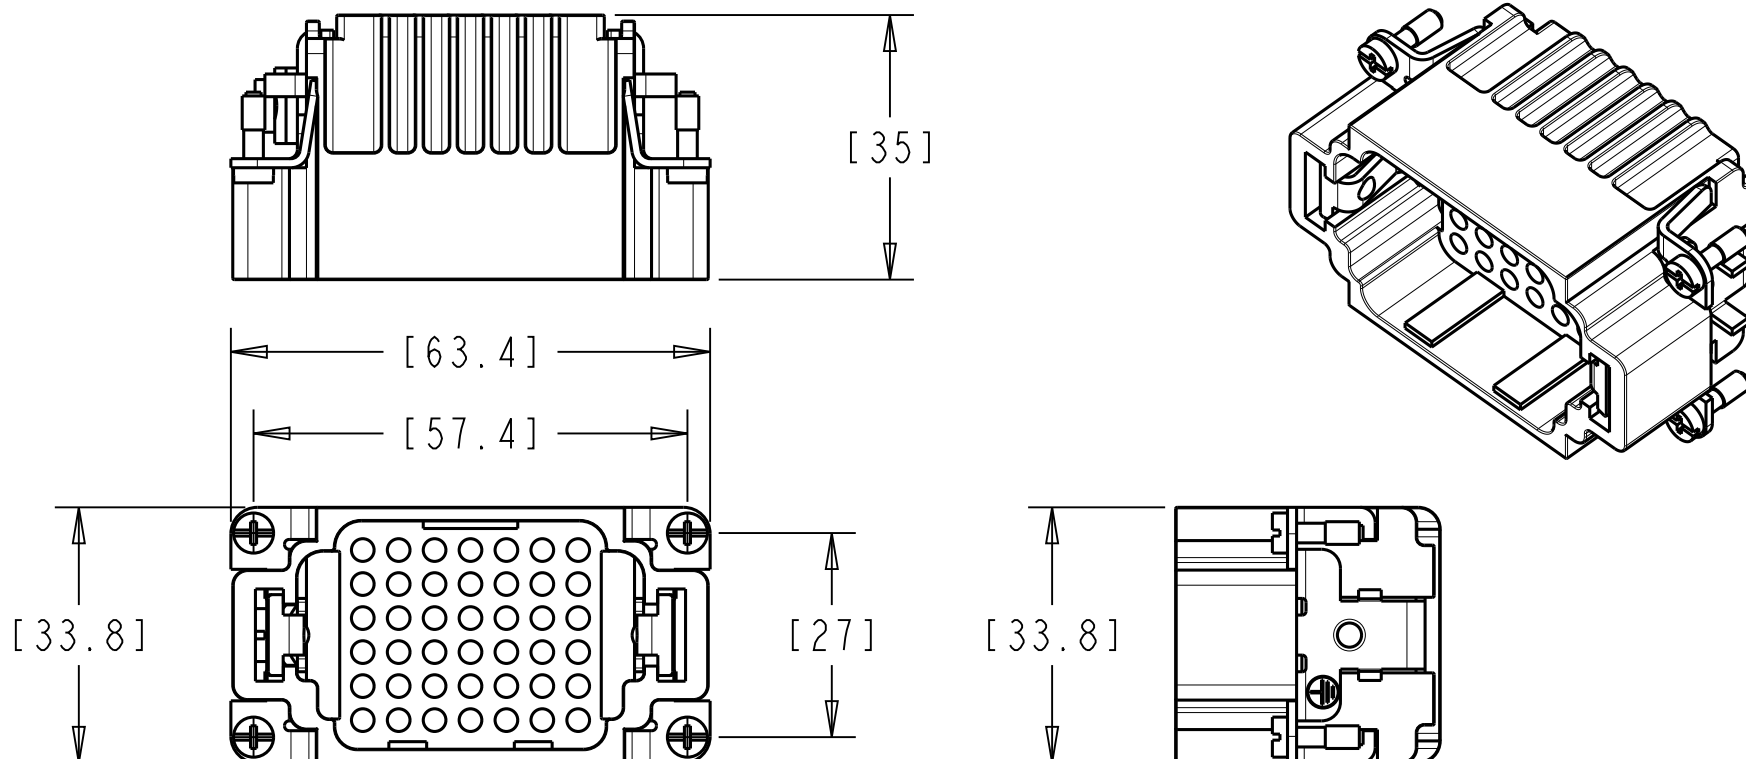

DD-SERIES 10A AT 600VAC: MALE INSERT FOR 42 CONTACTS + GROUND  
GLASS-FILLED THERMOPLASTIC INSERT RATED FOR -40 TO 125°C WITH UL940V-0 FLAMMABILITY RATING  
CONTACTS MADE FROM SOLID DRILLED COPPER ALLOY WITH HARD SILVER PLATING - HARD GOLD PLATING IS AVAILABLE  
SCREW TERMINALS FOR USE WITH WIRE RANGE .14-2.5 mm<sup>2</sup> [26-14 AWG]

www.tnb.com

REVISIONS		GENERAL NOTES		DESCRIPTION:			<div>MC242DD</div> <div>SALES DRAWING</div>		<div>Thomas&amp;Betts</div> <div>A Member of the ABB Group</div>	
** SEE ERN ( **** ) FOR APPROVAL SIGNATURES & RELEASE DATE. PROJECT NO: ****		1. ALL DIMENSIONS ARE FOR REFERENCE ONLY. 2. DIMENSIONS IN BRACKETS [ ] ARE IN METRIC UNITS.		ORIGINAL PROJECT NO / (ERN NO)  TM400024 / ( 2017906 )		SHEET NO:  1 OF 1	REV. NO:  0	DRAWING NO:  WSD-001820		

THIS DRAWING IS INTENDED FOR DESCRIPTIVE PURPOSES ONLY. AND THE RIGHT IS RESERVED TO DEVIATE FROM ANY OF THE DETAILS SHOWN HEREON.  
COPYRIGHT ABB GROUP. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL.