
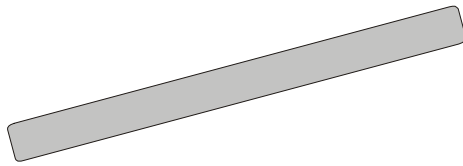


PRODUCT SPECIFICATION SHEET
I T C
Cable Entrance Insulating Plug
152EA-W


152EA

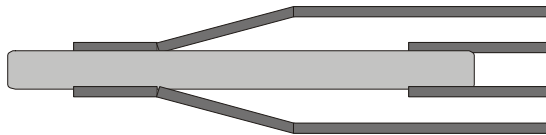

152EA INSTALLED

Application:

The ELASTIMOLD 152EA cable entrance insulating plug is designed to electrically insulate and water seal the cable entrances of the following ELASTIMOLD products:

K151SP straight plug
K151SR straight receptacle

The 152EA insulating plug essentially provides an electrically and mechanically sound dead-end cable entrance on any of the above products.

The normal function of the above products can be changed temporarily or permanently with the use of the 152EA and then can be restored by simply removing the 152EA and replacing it with a cable. Using the 152EA provides system flexibility by eliminating the need for certain operating accessory products and the product needed to terminate a future cable installation is already in place.

Ordering Instructicon:

To order, specify number **152EA-W**.

The 152EA cable entrance insulating plug is available for the following Elastimold conenctor cable entrance size EB, EF, FA, FAB, FB, FG, GA, GAB, GB, GH and HA.

The 152EA-W cable entrance insulating plug includes the following:

1 – Insulated plug	152EA-W
1 – Lubricant	82-08
1 – Installation instruction	IS-0347

Step 1 (W)
152EA –

Cable Insulation Dia. Range		Housing
inches	mm	Code
.495 - .585	12,6 - 14,9	EB
.525 - .635	13,3 - 16,1	EF
.575 - .685	14,6 - 17,4	FA
.610 - .735	15,5 - 18,7	FAB
.675 - .785	17,1 - 19,9	FB
.725 - .835	18,4 - 21,2	FG
.775 - .885	19,7 - 22,5	GA
.825 - .935	21,0 - 23,7	GAB
.875 - .985	22,2 - 25,0	GB
.930 - 1.040	23,6 - 26,4	GH
.980 - 1.115	24,9 - 28,3	HA