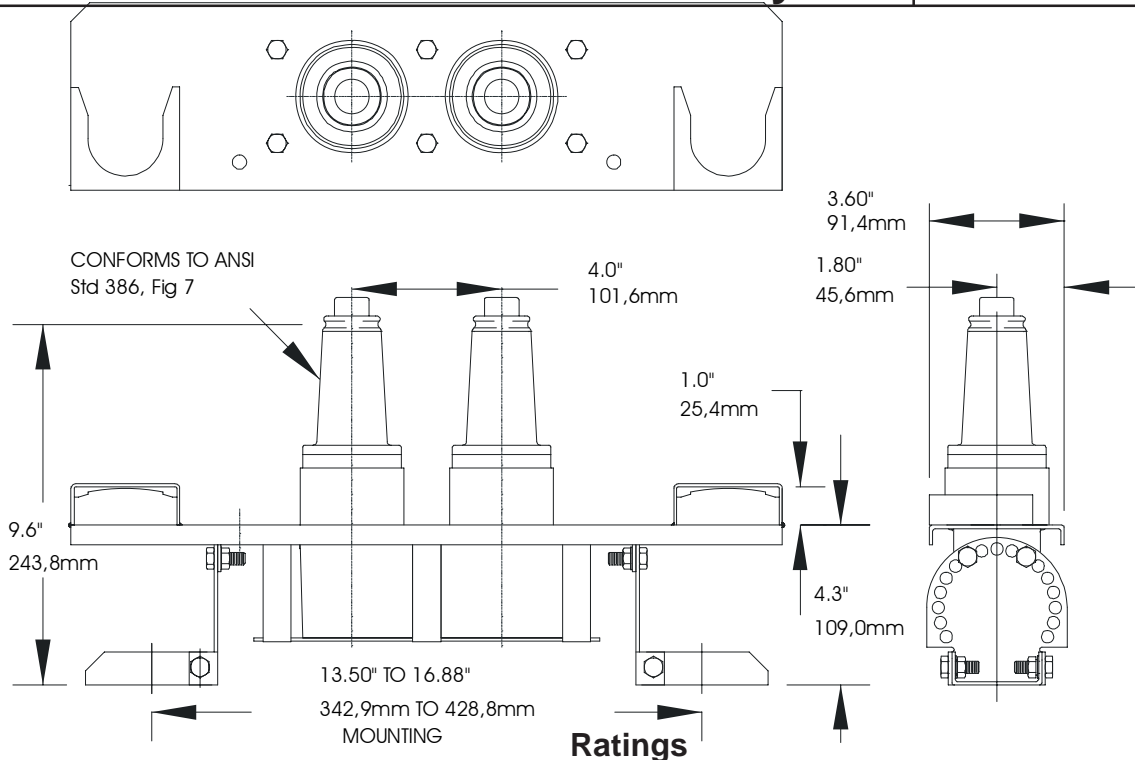


PRODUCT SPECIFICATION SHEET
I T C
25kV 200A Loadbreak Junction - 2 Way
274J2

Ratings

ELASTIMOLD junctions are designed for subsurface, vault or padmount applications and can be used for sectionalizing, looping, tapping, and equipment bypass. Junctions are designed to mate with other ELASTIMOLD products including:

- 273LR elbow connector
- 274LR elbow connector
- 370GLR grounding elbow
- 370TR test rod
- 273/274DR insulated cap

ELASTIMOLD loadbreak junctions, provide a fully shielded, fully submersible, separable, insulated assembly designed for energized operation. They are suitable for use on 25-kV class distribution systems, and rated for 200-ampere loadmake/loadbreak operation. Junctions are equipped with universal brackets that accommodate curved or flat surfaces and provide tilt mounting angles from 0° to 90° in 15° increments.

per ANSI/IEEE Standard 386

25kV Voltage Class

15.2kV Max Phase-to-Ground - Operating Voltage

26.3kV Max Phase-to-Phase

125kV BIL - Impulse Withstand (1.2 x 50 microsecond wave)

40kV AC - One minute Withstand

78kV DC - 15 Minutes Withstand

19kV AC - Corona Extinction @ 3p.C.sensitivity

200 Amp - Continuous and Loadbreak

10kA Sym - 10 Cycles Momentary & Fault Close

Ordering Instructions:

Specify **274J2** for 25kV, 200 Amp, 2-way Loadbreak Junction
Add "-5" at the end of the catalog number for junctions with "U" style mounting straps only.

Add "-6" at the end of the catalog number for bracket only with "U" strap and mounting hardware.

The 274J2 2-way Junction kit contains the following:

1 - Basic Molded Junction	274J2
2 - Protective shipping cap	2701-41
2 - Tube, lubricant	82-08
1 - Installation instruction	IS-0798