


Shrink-Kon®

PRODUCT REFERENCE:

HSB | **XXXX** - **X**
 TYPE OF HEAT SHRINK | EXPANDED DIAMETER AS SUPPLIED IN THOUSANDTHS OF A MILLIMETER | COLOR

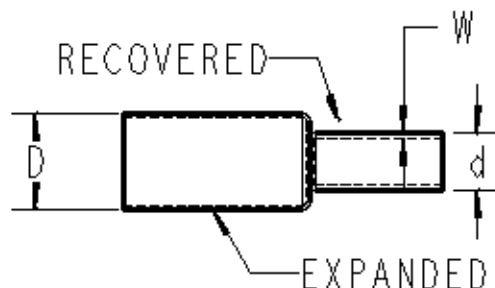

COLOR CHART

COLOR
= BLACK *
1 = BROWN
2 = RED
3 = ORANGE **
4 = YELLOW
5 = GREEN
6 = BLUE
7 = VIOLET **
8 = GREY
9 = WHITE
C = TRANSPARENT

* BLANK WHEN BLACK
 ** NOT AVAILABLE

EXAMPLE: HSB46-6 ('HSB' WITH 1.2mm EXPANDED DIA. IN GREEN)

NOTES:

- ALL PRODUCTS SHALL BE RoHS COMPLIANCE.
- STANDARD COLOR: BLACK, SEE ALTERNATE CATALOG NUMBER SCHEME FOR COLOR OPTIONS.
- PACKAGING: ALL "HSB" PRODUCTS ARE SUPPLIED IN A BOX WITH TUBING LENGTH PER "REFERENCE CHART" ON INNER SPOOL WITH A PDD LABEL.
BOX SIZE: 170mm X 170mm X 54mm

REFERENCE CHART

ABB PRODUCT REF.	EXPANDED DIA. AS SUPPLIED: (D) MIN.		FULLY RECOVERED DIA.: (d) MAX.	**** (W) NON. MAX.	TUBING LENGTH PER BOX
	[inch]	[mm]	[mm]	[mm]	[m]
HSB46	3/64"	1.2	0.6	0.4	12.0
HSB63	1/16"	1.6	0.8	0.4	12.0
HSB93	3/32"	2.4	1.2	0.5	11.5
HSB125	1/8"	3.2	1.6	0.5	11.5
HSB167	3/16"	4.8	2.4	0.5	9.5
HSB250	1/4"	6.4	3.2	0.6	7.5
HSB375	3/8"	9.5	4.7	0.6	6.5
HSB500	1/2"	12.7	6.4	0.6	6.0
HSB750	3/4"	19.1	9.5	0.8	5.0
HSB1000	1"	25.4	12.7	0.9	3.3

***WALL THICKNESS AFTER SHRINKING

'MATERIAL CHART'

MATERIAL	CROSSLINKED POLYOLEFIN
SHRINK RATIO	2:1
RoHS ALL COLORS	YES
TUBE TYPE	SINGLE WALL
TEMP. RANGE	-55°C TO +135°C
SHRINKING TEMP.	+110°C
WALL THICKNESS	SEE TABLE
STANDARD COLOR	BLACK
OTHER PROPERTIES	SILICONE, CADMIUM, & LEAD FREE TRANSPARENT VERSION: HALOGEN FREE

GENERAL NOTES

- ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.

REVISIONS

** SEE ERN (****)
 FOR APPROVAL SIGNATURES
 & RELEASE DATE.
 PROJECT NO: ****

www.tnb.com

DESCRIPTION:

THIN WALL HEAT SHRINK TUBING IN DISPENSER BOX

ORIGINAL PROJECT NO / (ERN NO)

017P000624 / (2016681)

SHEET NO:

1 OF 1

REV. NO:

**

DRAWING NO:

WSD-001466

Thomas & Betts
 A Member of the ABB Group