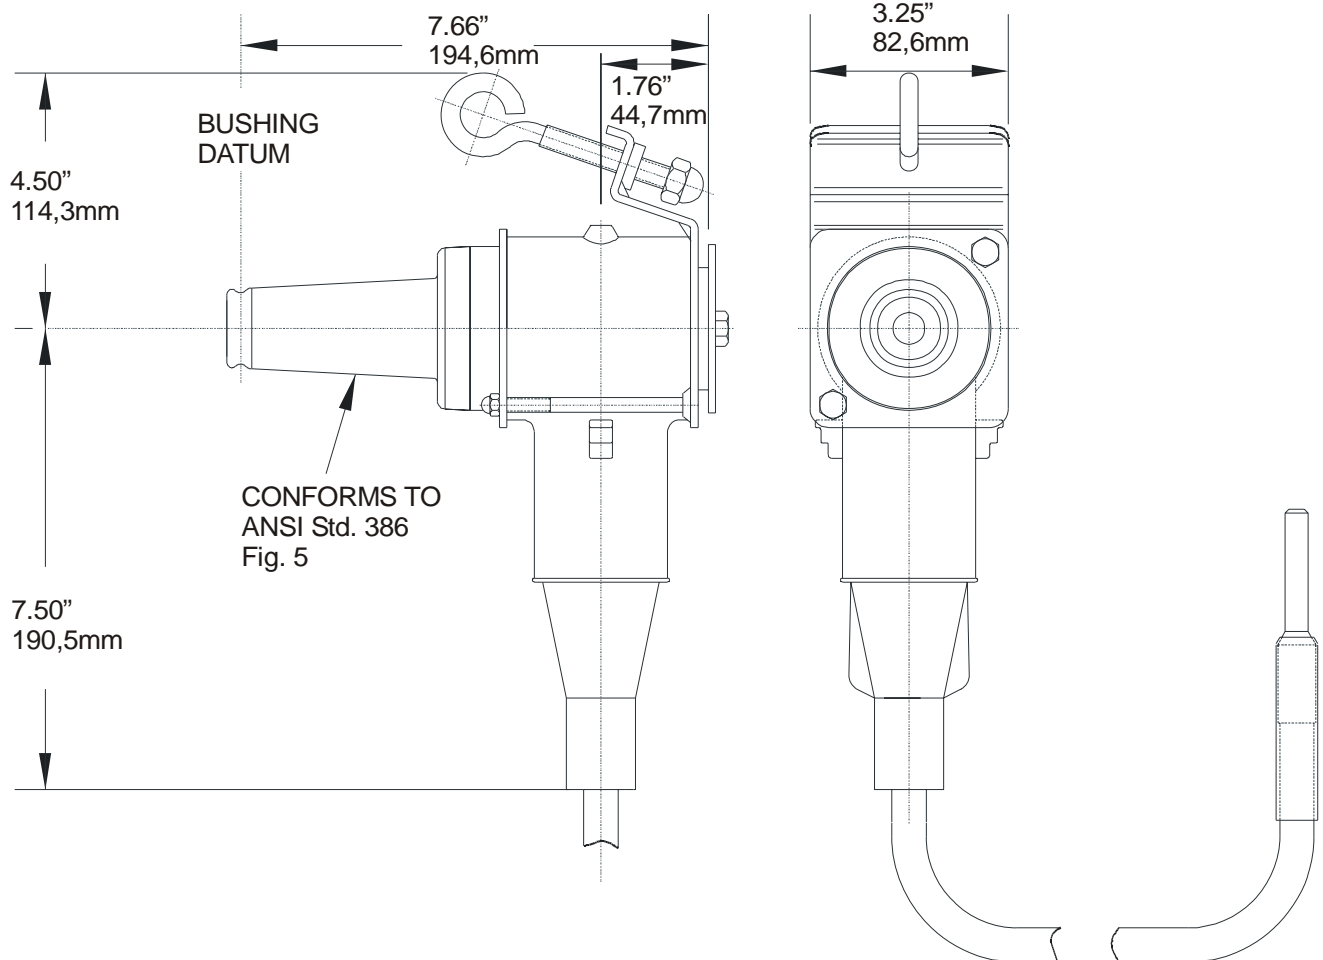


**PRODUCT SPECIFICATION SHEET**
**I T C**
**15kV 200A Grounding Plug**
**161GP**

**Ratings**

The Elastimold 161GP Grounding Plug is equipped with a 15kV class, 200 Amp loadbreak interface, 6 feet (183cm) of 1/0 AWG grounding cable, stainless steel mounting bracket and hot stick operable mounting hardware. The 161GP Grounding Plug is inserted into a standard parking stand with an insulated hot stick and secures in place. Mating Elastimold 15kV class loadbreak elbows can then be removed from the equipment and placed on the 161GP Grounding Bushing to ground the circuit.

per ANSI/IEEE Standard 386  
 15kV Voltage Class  
 200Amp - Continuous  
 10kA Sym - 10 Cycles Momentary & Fault Close

**Features:**

- Contains a fully operational fault close mechanism in the grounding plug.
- Stainless Steel mounting bracket.
- 5/16"-18 stainless steel eyebolt with brass cap nut allows hot stick installation and firmly secures the 161GP into the mating parking stand.

**Ordering Instructions:**

To order, specify catalog number **161GP** Grounding Plug

**The 161GP Grounding Plug includes the following:**

- |                             |            |
|-----------------------------|------------|
| 1 – Grounding Plug          | 161GP      |
| 1 – Lubricant               | 82-08      |
| 1 – Protective Shipping Cap | 1601-APC-1 |
| 1 – Operation instruction   | IS-0369    |